

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



10/524488




(43) International Publication Date
26 February 2004 (26.02.2004)

PCT

(10) International Publication Number
WO 2004/017461 A1

- (51) International Patent Classification⁷: H01Q 9/04, 1/24, 1/48
- (21) International Application Number: PCT/GB2003/003546
- (22) International Filing Date: 14 August 2003 (14.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0218820.9 14 August 2002 (14.08.2002) GB
- (71) Applicant (for all designated States except US): ANTEN-
OVA LIMITED [GB/GB]; Far Field House, Albert Road,
Stow-cum-Quy, Cambridge CB5 9AR (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): PALMER,
Tim, John [GB/GB]; Far Field House, Albert Road,
Stow-cum-Quy, Cambridge CB5 9AR (GB). WILSON,
Sarah [GB/GB]; 28 The Crest, Dinnington, Newcas-
tle-upon-Tyne NE13 7LU (GB). TYLER, Scott, William,
Spencer [GB/GB]; Far Field House, Albert Road,,
Stow-cum-Quy, Cambridge CB5 9AR (GB). KINGSLEY,
Simon, Philip [GB/GB]; Far Field House, Albert Road,,
Stow-cum-Quy, Cambridge CB59AR (GB).
- (74) Agent: HARRISON GODDARD FOOTE; Belgrave
Hall, Belgrave Street, Leeds LS2 8DD (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:**
— of inventorship (Rule 4.17(iv)) for US only
- Published:**
— with international search report
— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments
- For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: AN ELECTRICALLY SMALL DIELECTRIC ANTENNA WITH WIDE BANDWIDTH

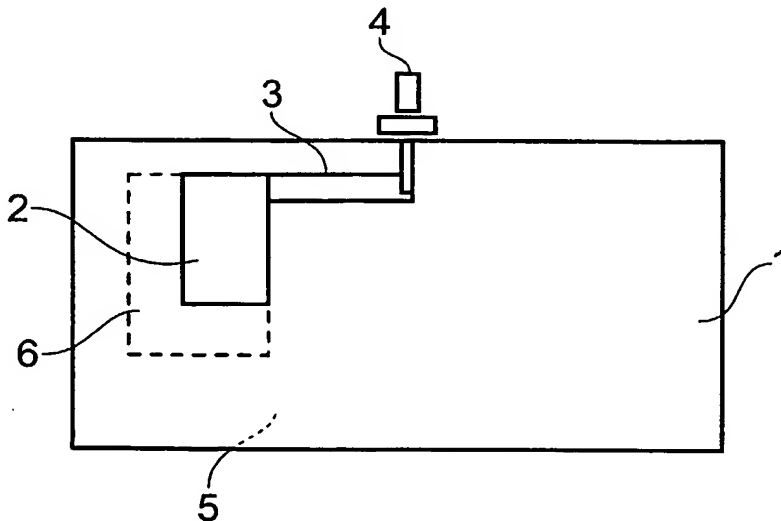

(57) Abstract: A dielectric antenna comprising a dielectric element mounted on a first side of a dielectric substrate, a microstrip feed located on the first side of the substrate and extending between the substrate and the dielectric element, and a conductive layer formed on a second side of the substrate opposed to the first, wherein an aperture is formed in the conductive layer at a location corresponding to that of the dielectric element. The antenna is electrically small, has wide bandwidth and good gain characteristics, is efficient and not easily detuned.

WO 2004/017461 A1

**AN ELECTRICALLY SMALL DIELECTRIC ANTENNA WITH WIDE
BANDWIDTH**

The present invention relates to a dielectric antenna having a feed and a groundplane
5 having an aperture, the dielectric antenna having wide bandwidth.

Dielectric antennas are devices that radiate or receive radio waves at a chosen
frequency of transmission and reception, as used in for example in mobile
telecommunications. In general, a dielectric antenna consists of a volume of a
10 dielectric material disposed on or close to a grounded substrate, with energy being
transferred to and from the dielectric material by way of monopole probes inserted
into the dielectric material or by way of monopole aperture feeds provided in the
grounded substrate (an aperture feed is a discontinuity, generally rectangular in
shape, although oval, oblong, trapezoidal 'H' shape, '<->' shape, or butterfly/bow tie
15 shapes and combinations of these shapes may also be appropriate, provided in the
grounded substrate where this is covered by the dielectric material. The aperture feed
may be excited by a strip feed in the form of a microstrip transmission line, grounded
or ungrounded coplanar transmission line, triplate, slotline or the like which is
located on a side of the grounded substrate remote from the dielectric material).
20 Direct connection to and excitation by a microstrip transmission line is also possible.
Alternatively, dipole probes may be inserted into the dielectric material, in which
case a grounded substrate may not be required. By providing multiple feeds and
exciting these sequentially or in various combinations, a continuously or
incrementally steerable beam or beams may be formed, as discussed for example in
25 the present applicant's co-pending US patent application serial number US
09/431,548 and the publication by KINGSLEY, S.P. and O'KEEFE, S.G., "Beam
steering and monopulse processing of probe-fed dielectric resonator antennas", IEE
Proceedings - Radar Sonar and Navigation, 146, 3, 121 - 125, 1999, the full contents
of which are hereby incorporated into the present application by reference.

30

The resonant characteristics of a dielectric antenna depend, *inter alia*, upon the shape and size of the volume of dielectric material, the shape, size and position of the feeds thereto and also on the shape, size and position of the groundplane. It is to be appreciated that in a dielectric antenna, it is the dielectric material that radiates when excited by the feed. This is to be contrasted with a dielectrically loaded antenna (DLA), in which a traditional conductive radiating element is encased in a dielectric material that modifies the resonance characteristics of the radiating element. As a further distinction, a DLA has either no, or only a small, displacement current flowing in the dielectric whereas a dielectric resonator antenna (DRA) or high dielectric antenna (HDA) has a non-trivial displacement current.

Dielectric antennas may take various forms, a common form having a cylindrical shape or half- or quarter-split cylindrical shape. The dielectric medium can be made from several candidate materials including ceramic dielectrics.

Dielectric resonator antennas (DRAs) were first studied systematically in 1983 [LONG, S.A., McALLISTER, M.W., and SHEN, L.C.: "The Resonant Cylindrical Dielectric Cavity Antenna", IEEE Transactions on Antennas and Propagation, AP-31, 1983, pp 406-412]. Since then, interest has grown in their radiation patterns because of their high radiation efficiency, good match to most commonly used transmission lines and small physical size [MONGIA, R.K. and BHARTIA, P.: "Dielectric Resonator Antennas - A Review and General Design Relations for Resonant Frequency and Bandwidth", International Journal of Microwave and Millimetre-Wave Computer-Aided Engineering, 1994, 4, (3), pp 230-247]. A summary of some more recent developments can be found in PETOSA, A., ITTIPOON, A., ANTAR, Y.M.M., ROSCOE, D., and CUHACI, M.: "Recent advances in Dielectric-Resonator Antenna Technology", IEEE Antennas and Propagation Magazine, 1998, 40, (3), pp 35 - 48.

A variety of basic shapes have been found to act as good dielectric resonator structures when mounted on or close to a ground plane (grounded substrate) and excited by an appropriate method. Perhaps the best known of these geometries are:

5 **Rectangle** [McALLISTER, M.W., LONG, S.A. and CONWAY G.L.: "Rectangular Dielectric Resonator Antenna", Electronics Letters, 1983, 19, (6), pp 218-219].

10 **Triangle** [ITTIPIBOON, A., MONGIA, R.K., ANTAR, Y.M.M., BHARTIA, P. and CUHACI, M.: "Aperture Fed Rectangular and Triangular Dielectric Resonators for use as Magnetic Dipole Antennas", Electronics Letters, 1993, 29, (23), pp 2001-2002].

15 **Hemisphere** [LEUNG, K.W.: "Simple results for conformal-strip excited hemispherical dielectric resonator antenna", Electronics Letters, 2000, 36, (11)].

20 **Cylinder** [LONG, S.A., McALLISTER, M.W., and SHEN, L.C.: "The Resonant Cylindrical Dielectric Cavity Antenna", IEEE Transactions on Antennas and Propagation, AP-31, 1983, pp 406-412].

25 **Half-split cylinder** (half a cylinder mounted vertically on a ground plane) [MONGIA, R.K., ITTIPIBOON, A., ANTAR, Y.M.M., BHARTIA, P. and CUHACI, M.: "A Half-Split Cylindrical Dielectric Resonator Antenna Using Slot-Coupling", IEEE Microwave and guided Wave Letters, 1993, Vol. 3, No. 2, pp 38-39].

30 Some of these antenna designs have also been divided into sectors. For example, a cylindrical DRA can be halved [TAM, M.T.K. and MURCH, R.D.: "Half volume dielectric resonator antenna designs", Electronics Letters, 1997, 33, (23), pp 1914 - 1916]. However, dividing an antenna in half, or sectoring it further, does not change the basic geometry from cylindrical, rectangular, etc.

High dielectric antennas (HDAs) are similar to DRAs, but instead of having a full ground plane located under the dielectric resonator, HDAs have a smaller ground plane or no ground plane at all. DRAs generally have a deep, well-defined resonant frequency, whereas HDAs tend to have a less well-defined response, but operate over a wider range of frequencies. HDAs can take the same variety of preferred shapes as DRAs. However, any arbitrary dielectric shape can be made to radiate and this can be useful when trying to design the antenna to be conformal to its casing.

In both DRAs and HDAs, the primary radiator is the dielectric resonator. In DLAs the primary radiator is a conductive component (e.g. a copper wire or the like) and the dielectric modifies the medium in which the antenna operates, and generally makes the antenna smaller.

For the purposes of the present application, the expression "dielectric antenna" is hereby defined as encompassing DRAs, HDAs and DLAs (since some embodiments of the present invention may be thought of as non-uniformly loaded monopoles).

According to a first aspect of the present invention, there is provided a dielectric antenna comprising a dielectric element mounted on a first side of a dielectric substrate, a microstrip feed located on the first side of the substrate and extending between the substrate and the dielectric element, and a conductive layer formed on a second side of the substrate opposed to the first, wherein an aperture is formed in the conductive layer at a location corresponding to that of the dielectric element.

Embodiments of the present invention are electrically small, have wide bandwidth and good gain characteristics, are efficient and are not easily detuned.

Embodiments of the present invention are particularly well suited as mobile telephone handset antennas, where increasingly wide bandwidths are required to cover the extra functionality that modern handsets need for operations at 3G (third generation) and Bluetooth® bands as well as existing GSM bands.

The conductive layer on the second side of the substrate may act as a groundplane for the antenna of embodiments of the present invention.

- 5 The aperture in the conductive layer is preferably greater in area than a surface of the dielectric element that faces or contacts the first side of the substrate. The aperture may be rectangular in shape or any other appropriate shape. The aperture may have a similar or substantially identical shape to that of the surface of the dielectric element that contacts the first side of the substrate, or may have a different shape.

10

The dielectric resonator may be a piece of low-loss dielectric ceramics material, and is preferably oblong or rectangular in shape, a half-split cylinder, or a half-split cylinder with its curved surface ground down so as to be substantially flattened. Other shapes and configurations, such as quarter-split cylindrical, are not excluded.

- 15 It has been found that embodiments of the present invention work well with different dielectric ceramics materials having different dielectric constants. While it is generally preferred that at least parts of the dielectric element contact the first side of the substrate, embodiments of the present invention may still function correctly when the dielectric element is mounted close to the substrate but not directly touching the
- 20 substrate. For example, where the microstrip feed is not completely flush with the first side of the substrate and the dielectric element is mounted on top of the microstrip feed, there may be a small air gap between a surface of the dielectric element facing the first side of the substrate and the first side of the substrate itself. The gap may be bridged with dielectric pads or strips or other dielectric filling
- 25 material, or possibly with conductive pads or strips or other conductive filling material.

- The microstrip feed advantageously passes between the dielectric element and the first side of the substrate at or towards one end of the dielectric element. Preferably,
- 30 the microstrip feed has a substantially linear extension in a vicinity of the dielectric

element, the substantially linear extension being disposed substantially orthogonal to a major axis of the dielectric element.

5 The microstrip feed line may extend only part way across a width of the dielectric element, or may extend across a full width of the dielectric element, or may even extend beyond a full width of the dielectric element. Although the best performance from the antenna of embodiments of the present invention has been observed when the microstrip feed is disposed as described above, it has been found by experimentation that other feed shapes do work, including feeds that bend or curl
10 round under the dielectric element, or are 'L' shaped, 'U' shaped, etc. under the dielectric element and are not orthogonal to the major axis of the dielectric element at every point.

15 The aperture in the conductive layer need not be surrounded on all sides by conductive material. For example, the aperture may be formed at an edge or corner of a substrate or may extend across a full width of a substrate. However, it is generally preferred for the aperture to be surrounded on all sides by conductive material.

20 It has been found that for any particular shape or configuration of dielectric element, there is an optimum or near-optimum size for the aperture.

Increasing a width of the slot (i.e. in a direction of extension of the microstrip feed) tends to increase the bandwidth of the dielectric antenna.

25

Increasing a length of the slot (i.e. in a direction generally orthogonal to the extension of the microstrip feed) tends to improve a frequency match, but does raise the resonant or operational frequency of the dielectric antenna.

30 The present applicant has found that the presence of the aperture in the conductive layer is crucial for exceptionally wide bandwidth performance. However, it has been

found by experimentation that part of the aperture can be 'filled in' by conducting material on either or both surfaces, provided that such conducting material does not touch the main groundplane. Further, when the aperture runs across a top edge of the substrate so that it has only one boundary with the main groundplane and when the aperture is filled in with conducting material on the same side as the groundplane with just a small gap between the two, then the width of the gap is crucial to obtaining a good return loss (a good match to 50 ohms). The return loss is poor for a gap of 0.5 mm, fair for a gap of 2 mm and good for a gap greater than 5 mm.

10 Prototypes of embodiments of the present invention have been constructed using a printed circuit board substrate material as the dielectric substrate, and copper as the conductive layer. It will be clear that other materials with appropriate characteristics may be used. It has been found that the antenna of embodiments of the present invention works well for different types of substrates having different thicknesses and
15 different dielectric constants.

It has also been found that the dielectric element can be placed on the second surface of the substrate, i.e. on the same side as the aperture. In this configuration it is more like conventional slot feeding, but with a much larger slot or aperture than is
20 customarily used.

According to a second aspect of the present invention, there is provided a dielectric antenna comprising a microstrip feed located on a first side of a dielectric substrate, a conductive layer formed on a second side of the substrate opposed to the first and
25 having an aperture formed therein, and a dielectric element mounted on a second side of the substrate within or at least overlapping the aperture.

In some embodiments of both the first and the second aspects of the present invention, the surface of the dielectric element facing or contacting the first or second
30 side of the dielectric substrate may be provided with a conductive coating or layer, e.g. by way of metallisation. This helps during manufacture of the antenna, since the

dielectric element can be attached to the appropriate surface of the dielectric substrate and/or the microstrip feed by way of reflow or reflux soldering. Alternatively or in addition, one or more other surfaces of the dielectric element may be provided with a conductive coating or layer, e.g. by way of metallisation.

5

For a better understanding of the present invention and to show how it may be carried into effect, reference shall now be made by way of example to the accompanying drawings, in which:

10 FIGURE 1 is a schematic plan view of a first embodiment of the first aspect of the present invention;

FIGURE 2 is a perspective view of the embodiment of Figure 1;

15 FIGURE 3 is a plan view of a second embodiment of the first aspect of the present invention;

FIGURE 4 is a plot of a vertical elevation radiation pattern for the embodiment of Figure 1;

20

FIGURE 5 is a plot of a horizontal elevation radiation pattern for the embodiment of Figure 1;

FIGURE 6 is a plot of an azimuth radiation pattern for the embodiment of Figure 1;

25

FIGURE 7 shows a computer-simulated 3D radiation pattern for a third embodiment of the first aspect of the present invention, also shown in Figure 7;

30 FIGURE 8 shows an alternative to the embodiments of Figures 1, 2 and 3 in which an underside of the dielectric element is provided with a conductive coating or layer; and

FIGURE 9 shows an embodiment of the second aspect of the present invention.

Referring to Figure 1, there is shown a dielectric substrate 1 in the form of a PCB, on a first surface of which is mounted a low-loss dielectric ceramics pellet 2 formed as a half-split cylinder with its curved face ground down to leave a flat top surface. A microstrip feed line 3 extends across the first surface of the substrate 1 from an SMA connector 4 and passes between the pellet 2 and the first surface of the substrate 1. It can be seen that the microstrip feed line 3 is substantially orthogonal to a major axis of the pellet 2 and passes thereunder at one end thereof. A second surface of the substrate 1, opposed to the first surface, is provided with a conductive metal layer 5, except in a region underneath the pellet 2 where an aperture 6 is defined by an absence of conductive material 5.

A prototype dielectric antenna has been constructed with a pellet 2 having a length of 18.2mm, a height of 5.8mm and a width of 8mm; the pellet 2 being mounted on a PCB 1 having a length of 80mm, a width of 35mm and a thickness (depth) of 1.6mm. A layer of copper has been used as the conductive layer 5. In one embodiment, the aperture 6 has a length of 35mm (corresponding to the width of the PCB 1) and a width of 14mm; in another embodiment, the aperture 6 has a length of 35mm and a width of 13.5mm.

Typical performance figures for the prototype dielectric antenna described above are shown in Table 1:

Table 1

	Min Frequency	Centre Frequency	Max Frequency	Measurement Level	Bandwidth %	Gain
S11	1444 MHz	1837 MHz	2230 MHz	VSWR 3:1	43%	N/A
S21	1250 MHz	1790 MHz	2330 MHz	-3dB	60%	3.3 dBi

The results show that the S_{11} return loss bandwidth and the S_{21} transmission bandwidth are both remarkably large for such a small antenna having good gain (3.3dBi).

- 5 Figure 2 shows an alternative view of the embodiment of Figure 1, with like parts being labelled as in Figure 1. The flattened top surface 7 of the pellet 2 is clearly shown.

Figure 3 shows an alternative embodiment of the present invention where the
10 aperture 6 extends across a whole width of the substrate 1.

Figures 4, 5 and 6 respectively show vertical elevation, horizontal elevation and azimuth radiation patterns for the embodiment of Figure 1 at various frequencies. It can be seen that useful gain is obtained across a frequency band from 1710 to
15 2170MHz. This frequency band encompasses the European 1800MHz, US 1900MHz and WCDMA mobile telephone frequency bands.

The dielectric antenna of the present invention has been simulated using Ansoft® HFSS electromagnetic simulation software. The simulation confirms that the
20 dielectric antenna radiates effectively over a wide bandwidth and that the results are not merely a measurement artefact arising due to radiation from cables, microstrips and the like. Figure 7 shows a simulation of a 3D radiation pattern at 1940MHz, which is in general agreement with measured patterns at that frequency. Figure 7 also shows a schematic of the simulated dielectric antenna, with parts being labelled
25 as in Figure 1.

Figure 8 shows an alternative embodiment to those of Figures 1, 2, 3 and 7, comprising a dielectric PCB substrate 1 with a dielectric ceramics pellet 2 mounted on a first surface of the substrate 1. A microstrip feedline 3 extends across the first
30 surface of the substrate 1 from an SMA connector 4 and passes between the pellet 2 and the substrate 1. A second surface of the substrate 1 is provided with a conductive

metal layer 5 which acts as a groundplane, except in a region underneath the pellet 2 where an aperture 6 is defined by an absence of conductive material 5. In contrast to the embodiments of Figures 1, 2, 3 and 7, the dielectric pellet 2 is provided on its underside with a metal layer or coating 8, which contacts the microstrip feedline 3 and the first surface of the dielectric substrate 1. The metal layer or coating 8 allows the pellet 2 to be attached to the substrate 1 by reflow or reflux soldering, which allows for quick and simple manufacture of the antenna and for a robust physical connection between the pellet 2 and the substrate 1.

Figure 9 shows an embodiment of the second aspect of the present invention, in which there is provided a dielectric PCB substrate 1 with a metal layer 5 provided on its underside except for an aperture 6 defined by an absence of the conductive metal layer 5. A microstrip feed 3 is located on a topside of the substrate 1, extending from an SMA connector 4 to a region of the topside corresponding to a location of the aperture 6 in the metal layer 5 on the underside of the substrate 1. In contrast to the embodiments of Figures 1, 2, 3 and 7, the low-loss dielectric ceramics pellet 2 is mounted on the underside of the substrate 1 in the aperture 6. The dielectric antenna of this embodiment could be considered to be operating in a slot-fed manner, but with a much larger slot or aperture 6 than is conventionally used. Indeed, in the embodiment shown, the slot or aperture 6 is wider than the pellet 2.

The preferred features of the invention are applicable to all aspects of the invention and may be used in any possible combination.

Throughout the description and claims of this specification, the words "comprise" and "contain" and variations of the words, for example "comprising" and "comprises", mean "including but not limited to", and are not intended to (and do not) exclude other components, integers, moieties, additives or steps.

CLAIMS:

1. A dielectric antenna comprising a dielectric element mounted on a first side of a dielectric substrate, a microstrip feed located on the first side of the substrate and extending between the substrate and the dielectric element, and a conductive layer formed on a second side of the substrate opposed to the first, wherein an aperture is formed in the conductive layer at a location corresponding to that of the dielectric element.
2. A dielectric antenna comprising a microstrip feed located on a first side of a dielectric substrate, a conductive layer formed on a second side of the substrate opposed to the first and having an aperture formed therein, and a dielectric element mounted on a second side of the substrate within or at least overlapping the aperture.
3. An antenna as claimed in claim 1 or 2, wherein the aperture is greater in area than a surface of the dielectric element facing or contacting the dielectric substrate.
4. An antenna as claimed in claim 1, 2 or 3, wherein the aperture is surrounded on all sides by the conductive layer.
5. An antenna as claimed in claim 1, 2 or 3, wherein the aperture extends to at least one edge or corner of the second side of the substrate and is thus not surrounded on all sides by the conductive layer.
6. An antenna as claimed in any preceding claim, wherein the dielectric element is made of a low-loss dielectric ceramics material.
7. An antenna as claimed in any preceding claim, wherein the dielectric element is oblong or rectangular in shape.

8. An antenna as claimed in any one of claims 1 to 6, wherein the dielectric element is half-split or quarter-split cylindrical in shape.

5 9. An antenna as claimed in any one of claims 6 to 8, wherein edge regions or curved surfaces of the dielectric element are chamfered or flattened by grinding or the like.

10 10. An antenna as claimed in any preceding claim, wherein the aperture has a shape similar to that of a surface of the dielectric element facing or contacting the dielectric substrate.

15 11. An antenna as claimed in any one of claims 1 to 9, wherein the aperture has a shape different from that of a surface of the dielectric element facing or contacting the dielectric substrate.

12. An antenna as claimed in claim 1 or any claim depending therefrom, wherein the microstrip feed passes between the dielectric element and the first side of the substrate at or towards one end of the dielectric element.

20 13. An antenna as claimed in any preceding claim, wherein the dielectric element has a major axis and a minor axis substantially parallel to the substrate, these axes respectively defining a length and a width of the dielectric element.

25 14. An antenna as claimed in claim 13, wherein the microstrip feed has a substantially linear extension which is substantially orthogonal to the major axis in a vicinity of the dielectric element.

30 15. An antenna as claimed in any one of claims 1 to 13, wherein the microstrip feed is curved, bent or curled in a vicinity of the dielectric element.

16. An antenna as claimed in claim 13 or any claim depending therefrom, wherein the microstrip feed extends only part way across the width of the dielectric element.

5 17. An antenna as claimed in claim 13 or in claim 14 or 15 when depending from claim 13, wherein the microstrip feed extends across the entire width of the dielectric element.

10 18. An antenna as claimed in claim 13 or in claim 14 or 15 when depending from claim 13, wherein the microstrip feed extends beyond the entire width of the dielectric element.

19. An antenna as claimed in any preceding claim, wherein the aperture is partially filled with a conducting material that does not contact the conductive layer.

15

20. An antenna as claimed in any preceding claim, wherein the dielectric element is provided with a conductive coating or layer on at least one surface thereof.

20 21. An antenna as claimed in claim 20, wherein the at least one surface is a surface of the dielectric element that faces or contacts the dielectric substrate.

22. A dielectric antenna substantially as hereinbefore described with reference to or as shown in the accompanying drawings.

1/6

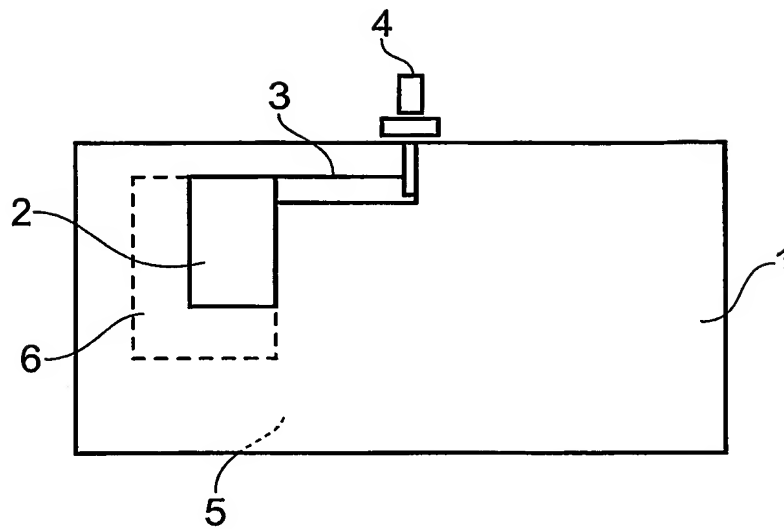


Fig. 1

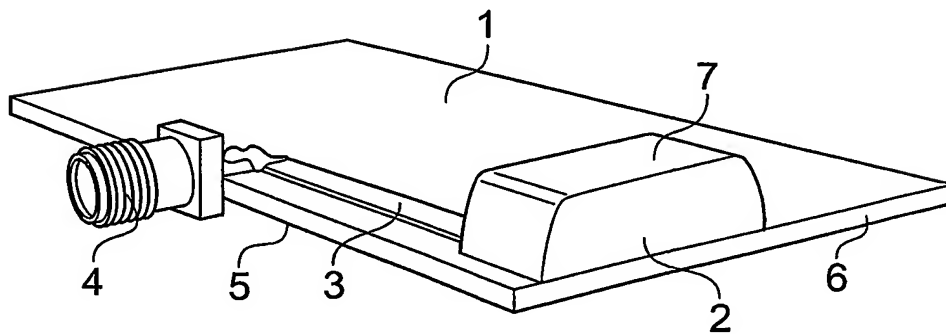


Fig. 2

2/6


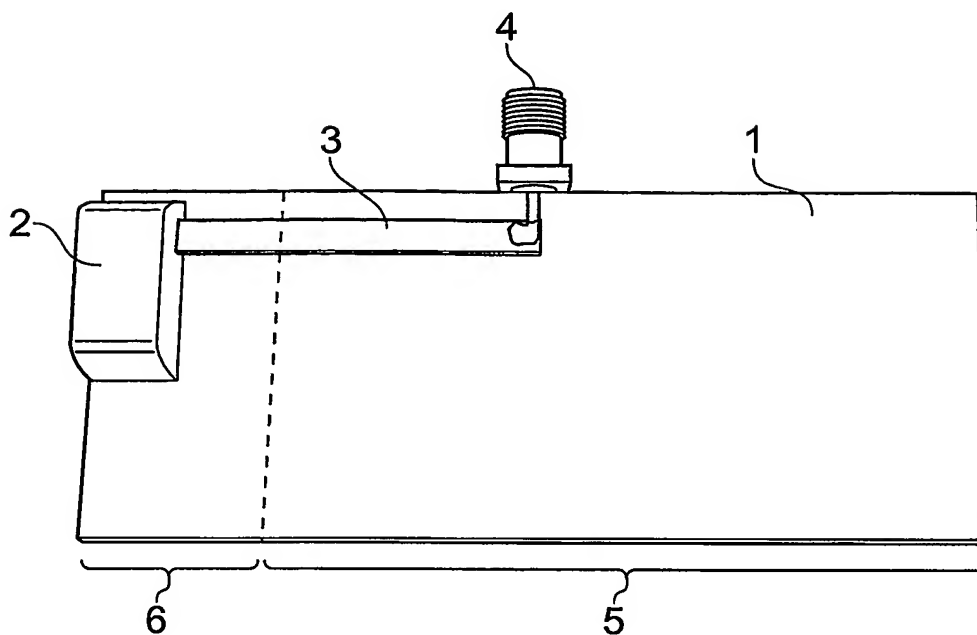



Fig. 3

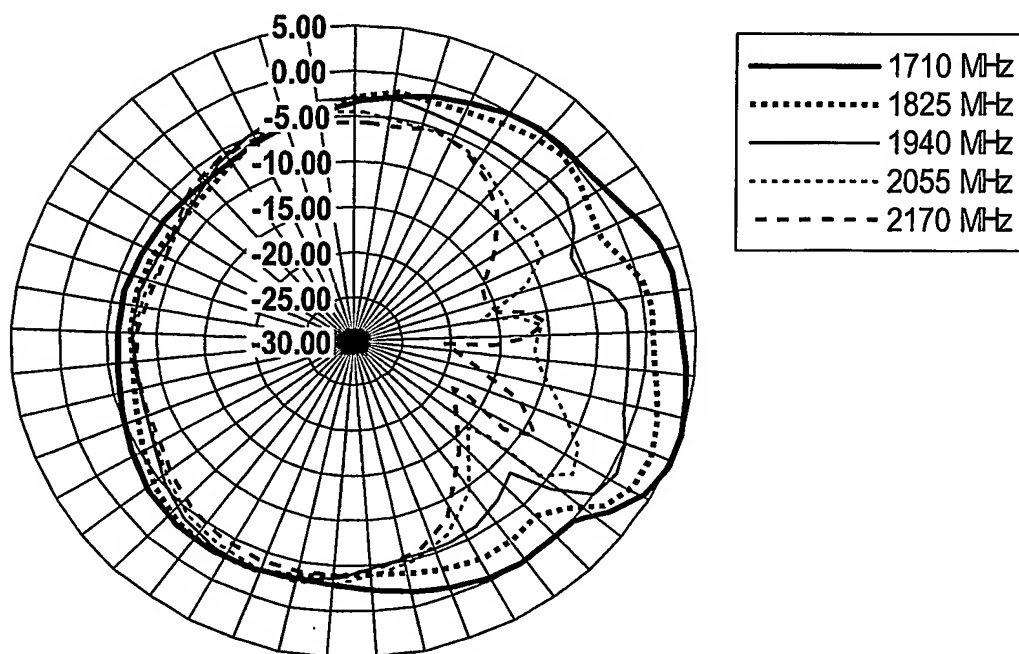

Horizontal Horn


Fig. 4

3/6

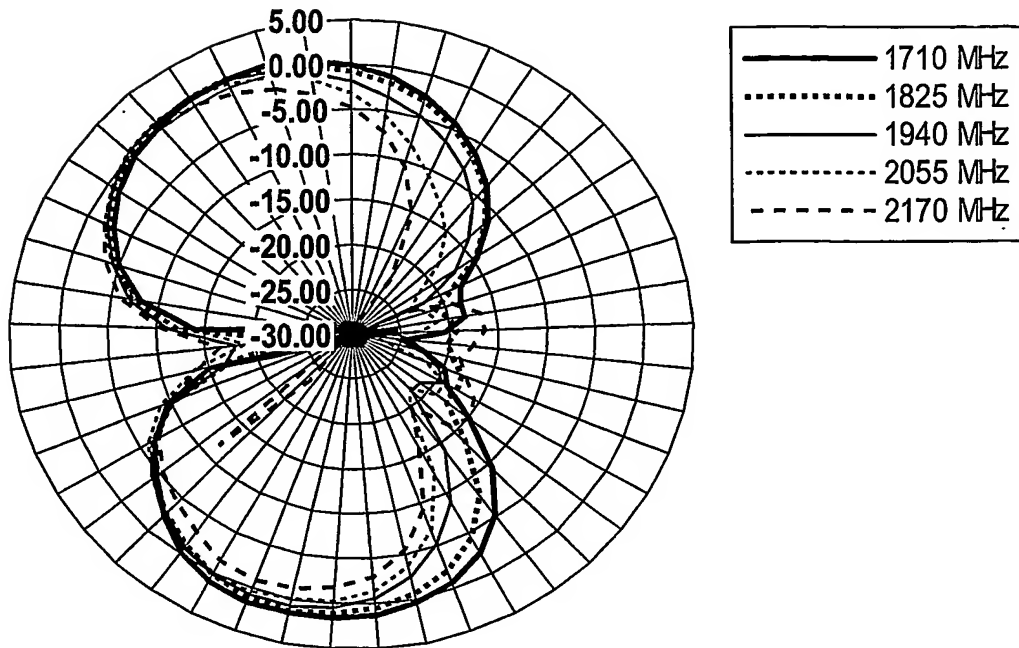

Vertical Horn

Fig. 5

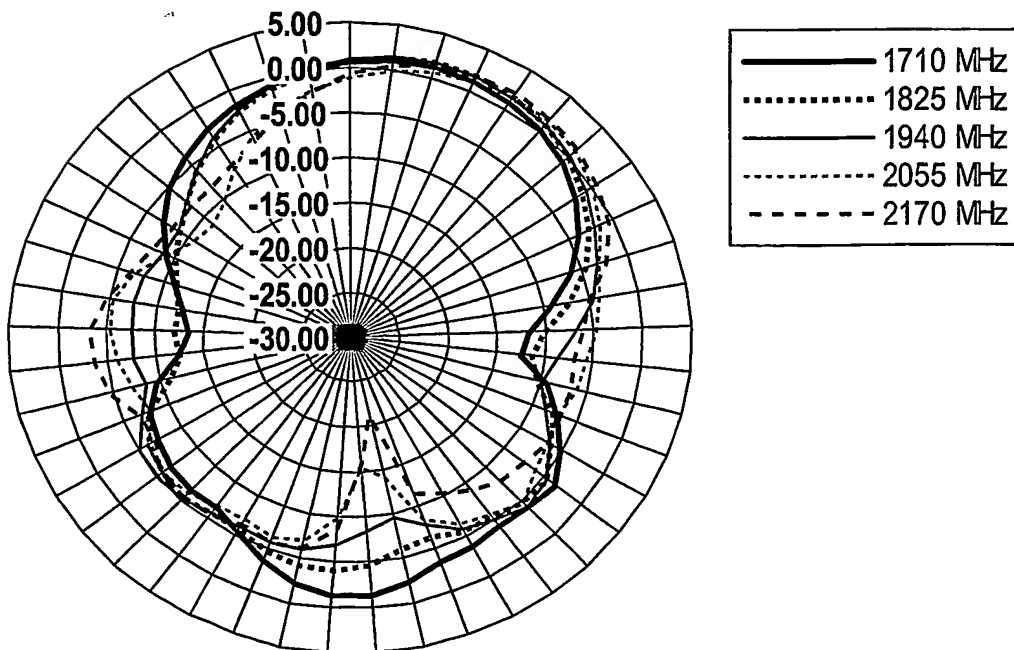

Vertical Horn

Fig. 6

4/6

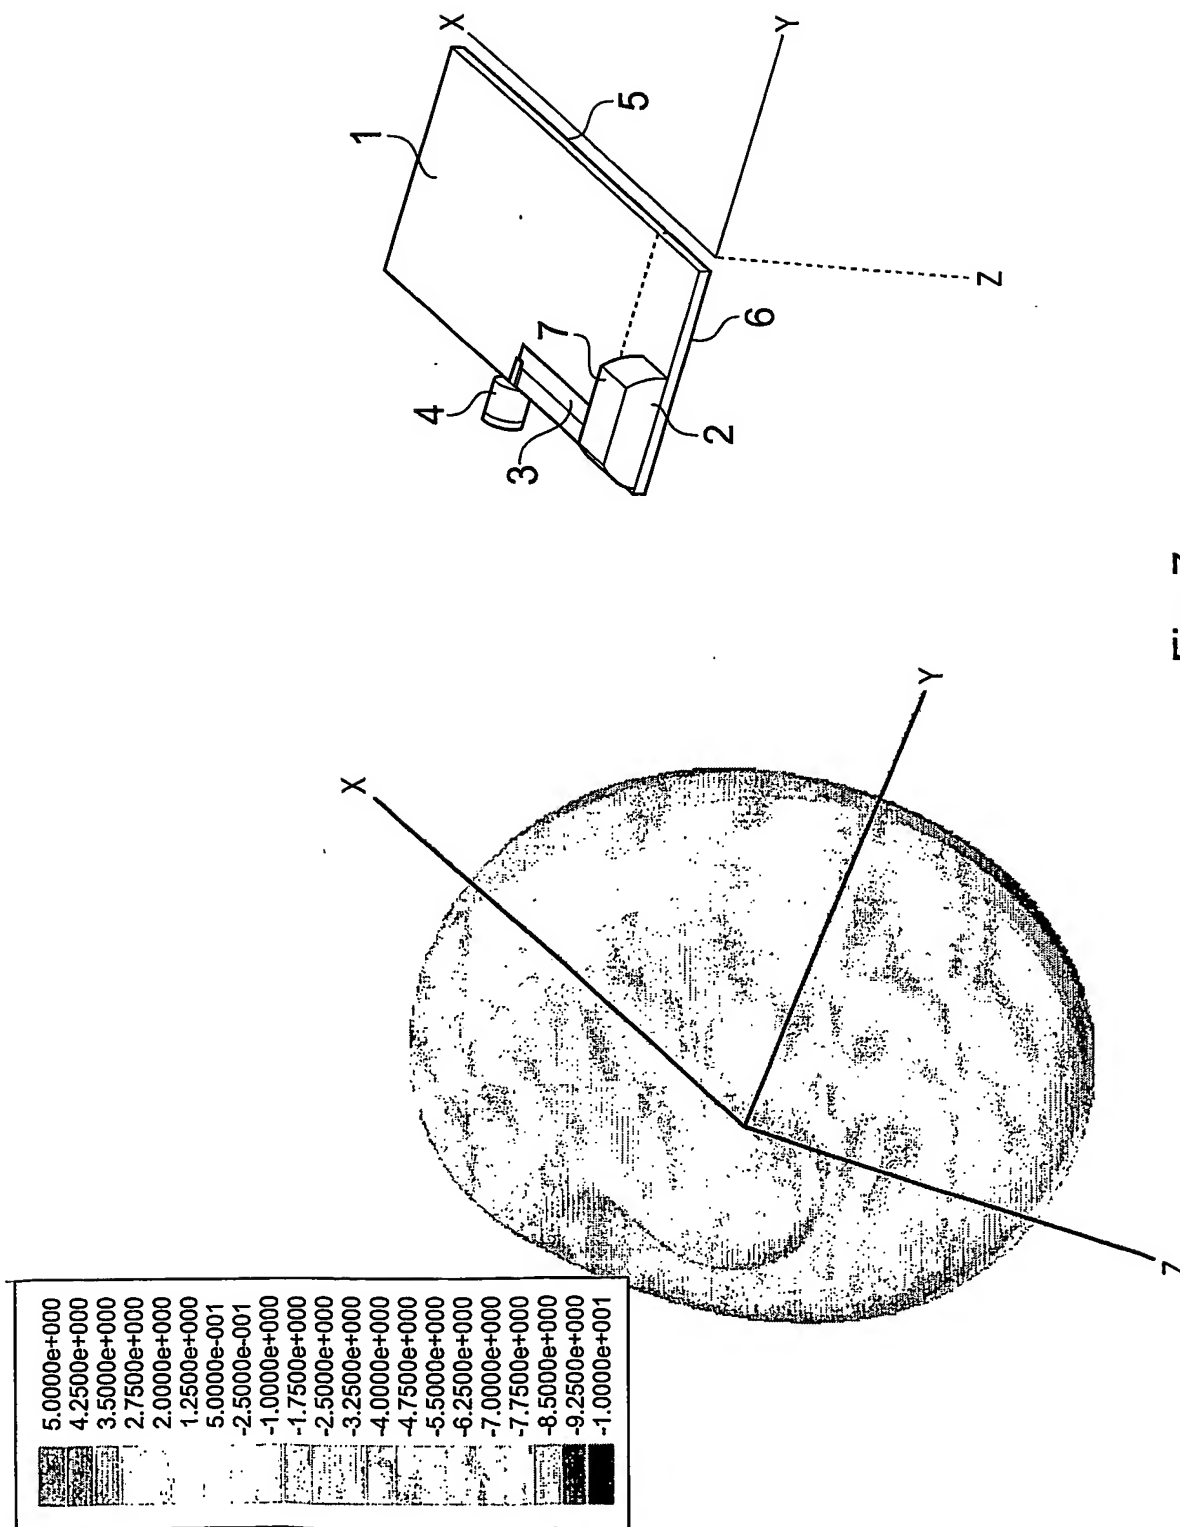


Fig. 7

5/6

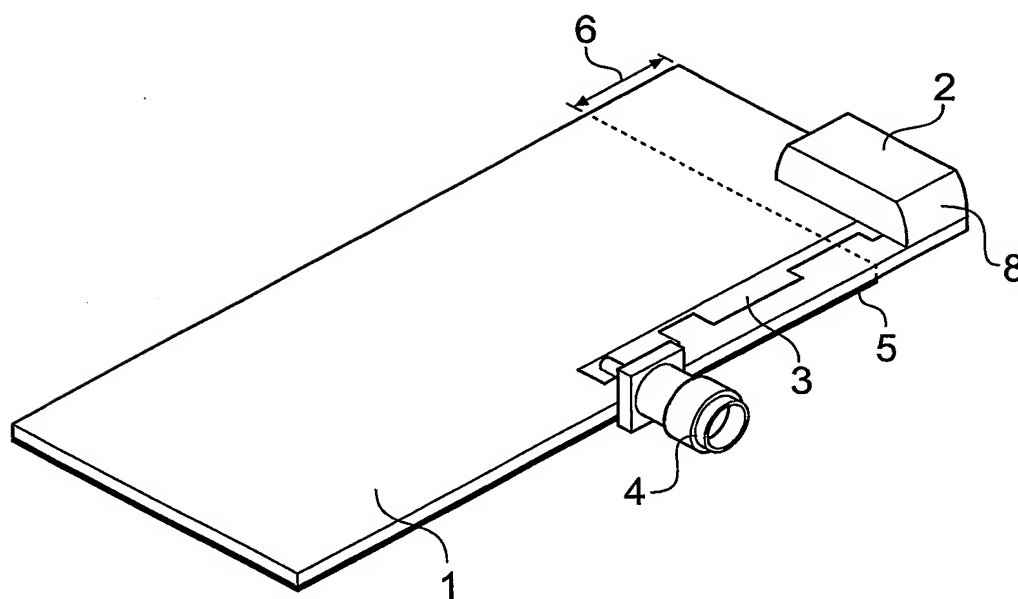


Fig. 8

6/6

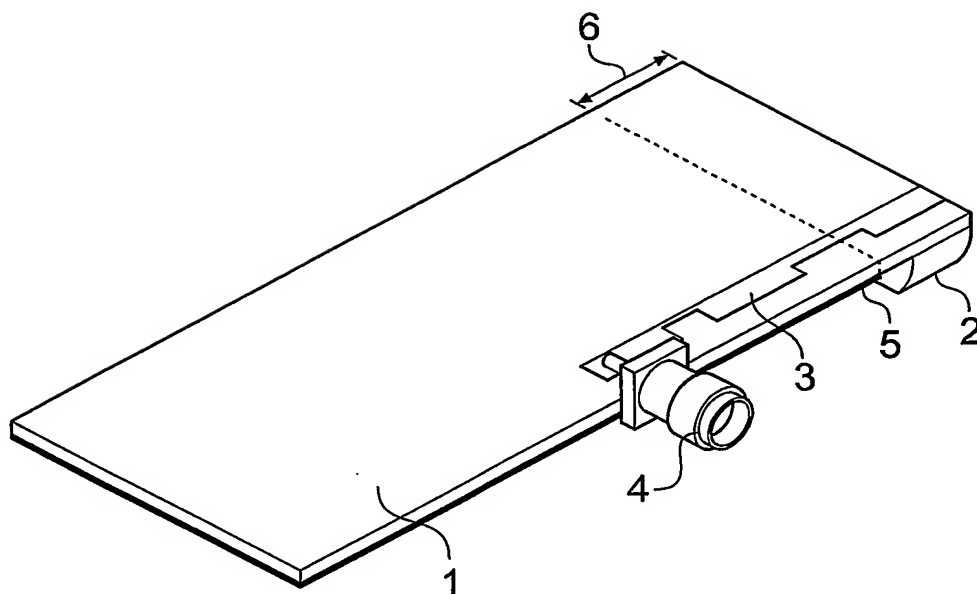


Fig. 9

INTERNATIONAL SEARCH REPORT

International Publication No

PCT/GB 03/03546

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01Q9/04 H01Q1/24 H01Q1/48

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/101382 A1 (KONISHI TAKAYOSHI ET AL) 1 August 2002 (2002-08-01)	1, 3, 5-9, 11, 13, 19-22
Y	paragraph '0187! - paragraph '0189!; figures 4, 5, 13	4, 10
X	EP 0 801 436 A (COMMUNICATON RESEARCH CENTRE) 15 October 1997 (1997-10-15) the whole document	1, 2, 6-9, 12-18, 22
Y	US 6 104 349 A (COHEN NATHAN) 15 August 2000 (2000-08-15)	4, 10
A	column 22, line 11 - line 47; figure 11B	11
A	US 2002/000938 A1 (HOASHI MASAKAZU ET AL) 3 January 2002 (2002-01-03) the whole document	3-5
	--- -/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

17 December 2003

Date of mailing of the international search report

29/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Moumen, A

BEST AVAILABLE COPY

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 03/03546

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP 0 982 799 A (PHILIPS CORP INTELLECTUAL PTY ;KONINKL PHILIPS ELECTRONICS NV (NL)) 1 March 2000 (2000-03-01) the whole document -----</p>	1,2

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 03/03546

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 2002101382	A1	01-08-2002	JP	2002232223 A	16-08-2002
			TW	522609 B	01-03-2003
EP 0801436	A	15-10-1997	CA	2173679 A1	10-10-1997
			AU	721740 B2	13-07-2000
			AU	1783497 A	16-10-1997
			EP	0801436 A2	15-10-1997
			US	5952972 A	14-09-1999
US 6104349	A	15-08-2000	US	6452553 B1	17-09-2002
			EP	0843905 A1	27-05-1998
			WO	9706578 A1	20-02-1997
			US	6140975 A	31-10-2000
			US	2003160723 A1	28-08-2003
US 2002000938	A1	03-01-2002	JP	2001345745 A	14-12-2001
			JP	2002094324 A	29-03-2002
EP 0982799	A	01-03-2000	DE	19837266 A1	24-02-2000
			EP	0982799 A2	01-03-2000
			JP	2000232317 A	22-08-2000
			KR	2000017328 A	25-03-2000
			TW	431029 B	21-04-2001
			US	6323824 B1	27-11-2001